

**CLARK**

# NPX

15D/17/20/22 ELECTRIC 24/36 VOLT



Max Load Capacity  
3000 / 3500 / 4000 / 4500 lbs.  
(1350 / 1600 / 1800 / 2000 kg)

**CLARK**



Rear posts add support to the overhead guard and help prevent objects from entering the operator compartment, helping to keep your employees as **safe** as possible.



## Reliable Performance with State of the Art Technology

The CLARK NPX 100% AC design, matched with energy-efficient components, delivers improved acceleration, travel and lifting speeds, increasing productivity. Operators have greater control to move product with more confidence. Reliable components require less service lowering overall costs.



# 65°

The NPX operator compartment and controls are designed with the operator standing at 65 degrees from center. This provides the widest range of flexibility and visual confirmation when traveling and handling loads to maximize productivity.

**Maximum Visibility + Minimum Fatigue = Increased Safety & Product Integrity**

The operator compartment is designed with comfort and productivity in mind. The contoured full-support backrest, padded armrest and tiller position are fully adjustable to customize the operator compartment reducing fatigue and maximizing productivity.

Silent-staging upright helps to reduce shock and vibration. Nested I-beam rails provide strength and rigidity. Cylinder and hose routing design provides open field of vision improving operator confidence.





# NPX Performance and Safety in Mind

Rugged and reliable the new CLARK NPX series forklift trucks offer superior controllability, excellent front and rear visibility and high-speed operation to help increase productivity and profit while at the same time helping to improve operator safety. And maintenance has been made easier than ever. For increased performance, count on the CLARK NPX.



## NPX CAPACITY

NPX 15D 3,000 lbs

NPX 17 3,500 lbs

NPX 20 4,000 lbs

NPX 22 4,500 lbs

## STATE OF THE ART TECHNOLOGY

- Advanced 100% AC motors and controllers.
- Electro-mechanical brakes.
- Electronic speed-sensitive power steering.
- High efficiency hydraulic system.



## BRAKING

- Primary (electric) braking provided through electronic controller.
- Service brake engages automatically at zero travel.
- Electro-mechanical brake reduces components and complexity.
- Smooth, consistent braking in all load and travel conditions.



**CALL OR VISIT CLARK TO LEARN MORE ABOUT THE NPX SERIES**

North American Headquarters  
866-252-5275 • [www.clarkmhc.com](http://www.clarkmhc.com)



# Design and Testing

At CLARK Material Handling Co. we have learned from over one hundred years designing and building forklifts that they need to be designed from the ground up to be reliable. We perform extensive testing to ensure that our electric forklift trucks meet high environmental standards and provide reliable operation in most environments. Testing of components, subassemblies and complete products goes hand in hand with all phases of the design and production cycle.



## TRUE MULTIFUNCTION CONTROL

### CLARK Designed Control Handle

- 3-Function design allows simultaneous operation of (1) travel, (2) lift or lower AND (3) one additional hydraulic function.

### Integrated Mini-Thumbstick

- Controls Tilt & Reach + Side Shift.

### Makes for One Smooth Operator

- Handle is 100% proportional using (solid state) Hall-effect components.
- Designed to fit a wide range of hand sizes and still give that "custom fit" feel for better ergonomics and less operator fatigue.

## ELECTRONIC STEERING

- Speed-sensitive steering provides optimal control when transporting or positioning loads.
- Self-centering function aligns drive wheel at key-on.
- Tiller can be placed in preferred position by individual operator.
- Quiet and energy efficient.



### Standard Equipment

- Key switch
- Load backrest extension
- Electronic horn
- Rear overhead guard post protection
- Heavy-duty battery rollers
- Battery retainers
- Lever type battery connect-disconnect
- Metal capacity plate

### Available Equipment

- Side shifter
- Freezer conditioning
- Reverse steering
- Travel alarms
- Strobe warning lights
- Operating lights
- U.L. Classified EE rating

# GENERAL DATA & STANDARD DIMENSIONS

## Upright Table

Maximum Fork Height		Overall Height Lowered		Free Lift**	
in	mm	in	mm	in	mm
Triple Stage					
198	5029	89	2261	54	1372
210	5334	95	2413	60	1524
240	6096	107	2718	72	1829
258	6553	113	2870	78	1981
270	6858	119	3023	84	2134
300	7620	131	3327	96	2438
318	8077	139	3531	104	2642
• 330	8382	149	3785	114	2896
• 366	9296	161	4089	126	3200

For overall height raised with load backrest, add 48 in (1219 mm) to maximum fork height. Other uprights available, contact Clark representative. Uprights above 270" N/A on NPX17.

• NPX 15D, NPX 22 only.

## Carriage Widths\*/Fork Spread in(mm)

Carriage Width in mm		Fork Spread w/o Side Shifter max min		Fork Spread w/ Side Shifter max min	
33	838	31.0(787)	13.0(330)	27.7(704)	22.3(566)
37	940	35.0(889)	13.0(330)	27.7(704)	22.3(566)

\* 37 in. wide carriages available with outrigger I.D. 38 in. and greater (40 in. and greater with 10.5 in. load wheels.)

## NPX Min. Right Angle Stack Aisle in(mm)\*

Pallet or Load Size Length x Width	Battery Compartment (L)			
	13.88 (353)	16.13 (410)	18.5 (470)	21 (533)
36x30(914x762)	89.8 (2282)	92.3 (2345)	96.7 (2455)	99.2 (2519)
36x40(914x1016)	93.4 (2372)	95.9 (2435)	100.1 (2543)	102.6 (2607)
40x40(1016x1016)	96.2 (2443)	98.7 (2506)	103.0 (2615)	105.5 (2679)
42x36(1067x914)	96.4 (2448)	98.9 (2512)	103.2 (2622)	105.7 (2686)
48x40(1219x1016)	102.4 (2602)	104.9 (2665)	109.3 (2776)	111.8 (2840)
48x42(1219x1067)	103.0 (2616)	105.5 (2680)	109.9 (2790)	112.4 (2854)
48x44(1219x1118)	103.6 (2631)	106.1 (2695)	110.4 (2805)	112.9 (2869)
48x48(1219x1219)	104.8 (2662)	107.3 (2726)	111.6 (2836)	114.1 (2899)

\* Add 6 to 8 inches clearance for ease of operation. Dimensions are based on 42 inch I.D. outrigger with 5 x 3.76 in. load wheels and 4" clearance each side of load.

\*\*Add 8" for NPX 15D (plus operating clearance).

## Outrigger Dimensions - I.D./O.D. (in)

Dual 5 x 3.76 Load Wheels Toe Box Width 5.5 in I.D. O.D.		Dual 5 x 3.01 Load Wheels Toe Box Width 4.5 in I.D. O.D.		Single 10.5 x 4.5 Load Wheels Toe Box Width 6.0 in I.D. O.D.		Dual 4 x 2.62 Load Wheels Toe Box Width 4.5 in I.D. O.D.	
33	44	33	42	-	-	33	42
34	45	34	43	-	-	34	43
36	47	35	44	36.25	48.25	35	44
38	49	37	46	38.25	50.25	37	46
40	51	39	48	40.25	52.25	39	48
41	52	41	50	41.25	53.25	41	50
42	53	42	51	42.25	54.25	42	51
44	55	43	52	44.25	56.25	43	52
46	57	45	54	46.25	58.25	45	54
48	59	47	56	48.25	60.25	47	56
50	61	49	58	50.25	62.25	49	58
-	-	51	60	-	-	51	60

## Outrigger Dimensions - I.D./O.D. (mm)

Dual 127 x 96 Load Wheels Toe Box Width 140mm I.D. O.D.		Dual 127 x 76 Load Wheels Toe Box Width 114mm I.D. O.D.		Single 267 x 114 Load Wheels Toe Box Width 152mm I.D. O.D.		Dual 102 x 67 Load Wheels Toe Box Width 114mm I.D. O.D.	
838	1118	838	1067	-	-	838	1067
864	1143	864	1092	-	-	864	1092
914	1194	889	1118	921	1226	889	1118
965	1245	940	1168	972	1276	940	1168
1016	1295	991	1219	1022	1327	991	1219
1041	1321	1041	1270	1048	1353	1041	1270
1067	1346	1067	1295	1073	1378	1067	1295
1118	1397	1092	1321	1124	1429	1092	1321
1168	1448	1143	1372	1175	1480	1143	1372
1219	1499	1194	1422	1226	1530	1194	1422
1270	1549	1245	1473	1276	1581	1245	1473
-	-	1295	1524	-	-	1295	1524

## Battery Weights & Compartment Dimensions

Width (W) in mm		Length (L) in mm		Height (H) in mm		Min. Weight lbs. kg	
38.75	984	13.88	353	32.0	813	1590	721
38.75	984	16.13	410	32.0	813	1885	855
38.75	984	18.50	470	32.0	813	2175	987
38.75	984	21.00	533	32.0	813	2460	1116


## Maximum Battery Size

Width (W) in mm		Length (L) in mm		Height (H) in mm	
38.69	983	13.50	343	31.5	800
38.69	983	15.75	400	31.5	800
38.69	983	18.00	457	31.5	800
38.69	983	20.50	521	31.5	800

## Operator Compartment/ Overhead Guard Dimensions

Maximum Fork Height in mm		Compartment Inside in mm		Overhead Guard Height in mm	
198	5029	75	1905	89	2261
210	5334	81	2057	95	2413
240	6096	81	2057	95	2413
258	6553	81	2057	95	2413
270	6858	81	2057	95	2413
300	7620	81	2057	95	2413
318	8077	81	2057	95	2413
* 330	8382	81	2057	95	2413
* 366	9296	81	2057	95	2413

\* NPX 15D, NPX 22 only.

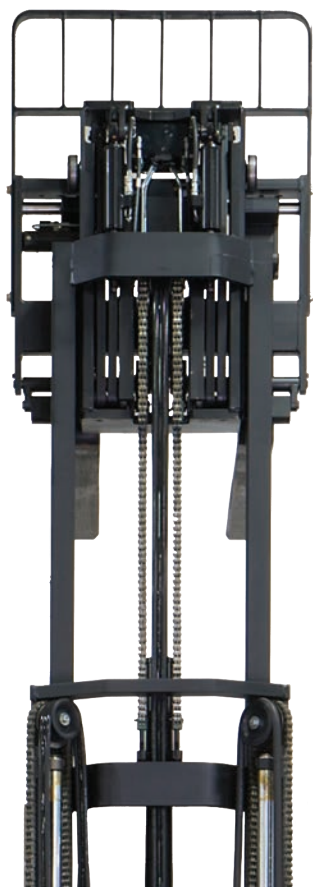

Technical drawings of a forklift showing top and side views with dimensions and callouts.

**Top View Dimensions:**

- 6in (152mm)
- 23
- 17
- 42
- 25
- Stroke
- 23.8in (603mm) NPX 17/20
- 23.4in (595mm) NPX 22
- 41.2in (1046) NPX 15D
- Fork Spread
- Outrigger ID OD
- 16

**Side View Dimensions:**

- 20
- 21
- 15
- 41
- 15
- 22
- NPX 15D
- NPX 17/20/22
- 26
- 22.5in (572mm) NPX 17/20/22
- 20.8in (528mm) NPX 15D
- 18
- 9
- 19
- C.G. of Load

General Information	1	Manufacturer		
	2	Model	Manufacturer's Designation	
	3	Load Capacity		lbs(kg)
	4	Load Center	Fork Face to Load CG	in(mm)
	5	Power Unit	Electric	
	6	Operator Type		
	7	Tire Type		
	8	Wheels (x=driven)	Front/Rear	
Basic Dimensions <sup>1,2</sup>	9			
	10	Upright <sup>3</sup>	Lift Height (Preferred Upright)	in(mm)
	11		Freelift	in(mm)
	12	Fork Tilt	Back/Forward	degrees
	13	Fork	Std. Fork Size (T x W x L)	in(mm)
	14	Carriage	Width of Carriage	in(mm)
	15	Overall Dimensions	Length to Fork Face	in(mm)
			Overall length, less forks	in(mm)
	16		Outrigger ID/OD	in(mm)
	17		Frame Width	in(mm)
	18		Height, Upright Lowered	in(mm)
	19		Height, Upright Extended	in(mm)
	20		Height, Overhead Guard	in(mm)
	21	Step Height	Ground to Top of Floor Plate	in(mm)
	22	Head Clearance	Top of Floor Plate to Bottom of OHG	in(mm)
	23	Turning Radius		in(mm)
	Performance	24		
25		Right Angle Stack Aisle <sup>4</sup>	48 in x 40 in pallet	in(mm)
26		Battery Compartment	W x L x H	in(mm)
		Battery Roller Height	Ground to Top of Rollers	in(mm)
27		Stability	According to ANSI	
28		Speeds- Forks Trailing	Travel Speed, Max, With Load <sup>5</sup>	mph(kph)
29			Travel Speed, Max, Without Load <sup>5</sup>	mph(kph)
30			Lift Speeds, Loaded	fpm(mps)
31			Lift Speeds, Unloaded	fpm(mps)
32			Lower Speeds, Loaded	fpm(mps)
Weights <sup>2</sup>	33		Lower Speeds, Unloaded	fpm(mps)
	34	Service Weight, TSU	W/Min Battery Weight	lbs(kg)
	35	Axle loading	With Load, Front	lbs(kg)
	36		With Load, Rear	lbs(kg)
	37		W/O Load, Front	lbs(kg)
Chassis	38		W/O Load, Rear	lbs(kg)
	39	Tires/Wheels	Number, Front/Rear	
	40		Size, Load Wheels	in(mm)
			Size, Rear Drive/Steer	in(mm)
			Size, Rear Caster	in(mm)
	41	Wheelbase		in(mm)
	42	Track	Rear	in(mm)
	43			
	44	Ground Clearance	With 5 in diameter load wheels	in(mm)
	45			
Drive Line	46	Service Brake	Type	
	47	Parking Brake	Type	
		Steering	Type	
	48	Battery	Type	
			Max Capacity (6 hr. Rate) 24V/36V	kWh
			Weight, Min	lbs(kg)
	49	Motors, Controls	Drive Motor, Diameter	in(mm)
			Hydraulic Motor, Diameter	in(mm)
			Steer Motor, diameter	in(mm)
			Drive Motor Control	Type
		Speed Control	Type	
		Hydraulic Motor Control	Type	
		Steer Motor Control	Type	

Notes: 1 Specifications are for truck with tandem 5 in (127 mm) diameter x 3.76 in (96mm) wide load wheels. Other sizes are also available.  
2 Specifications are for truck with 210 in (5334 mm) MFH upright, 42 in (1067 mm) outrigger ID and 33 in (838 mm) sideshifter (deduct 50 lb. (23kg) for weight less SS). Battery compartment dimensions as noted.  
3 See Upright Table for other available uprights.



CLARK NPX17	CLARK NPX20	CLARK NPX22	CLARK NPX15D
3500 (1600)	4000 (1800)	4500 (2000)	3000 (1350)
24 (600)	24 (600)	24 (600)	24 (600)
Dual 24 volt / 36 volt	Dual 24 volt / 36 volt	36 volt	36 volt
Rider Reach	Rider Reach	Rider Reach	Rider Double Reach
Solid	Solid	Solid	Solid
4/2 (1x)	4/2 (1x)	4/2 (1x)	4/2 (1x)
210 (5334)	210 (5334)	210 (5334)	210 (5334)
60 (1524)	60 (1524)	60 (1524)	60 (1524)
4/3	4/3	4/3	4/3
1.75 x 4 x 42 (44 x 102 x 1067)	1.75 x 4 x 42 (44 x 102 x 1067)	1.75 x 4 x 42 (44 x 102 x 1067)	1.75 x 4 x 42 (44 x 102 x 1067)
33 (838)	33 (838)	33 (838)	33 (838)
48.1 (1222)	48.1 (1222)	51.1 (1298)	61.0 (1550)
70.25 (1784)	70.25 (1784)	75.9(1928)	81.8(2078)
See Outtrigger Dimension Chart	See Outtrigger Dimension Chart	See Outtrigger Dimension Chart	See Outtrigger Dimension Chart
40.25 (1022)	40.25 (1022)	40.25 (1022)	40.25 (1022)
95 (2413)	95 (2413)	95 (2413)	95 (2413)
258 (6553)	258 (6553)	258 (6553)	258 (6553)
95 (2413)	95 (2413)	95 (2413)	95 (2413)
12.2 (310)	12.2 (310)	12.2 (310)	12.2 (310)
81 (2057)	81 (2057)	81 (2057)	81 (2057)
66.8 (1698)	66.8 (1698)	72 (1829)	75 (1905)
102 (2602)	102 (2602)	109 (2776)	116 (2940)
38.75x13.88x32 (984x353x813)	38.75x13.88x32 (984x353x813)	38.75x18.5x32 (984x470x813)	38.75x18.5x32 (984x470x813)
6.25 (159)	6.25 (159)	6.25 (159)	6.25 (159)
Yes	Yes	Yes	Yes
6.8 (10.9) / 7.5 (12.0)	6.6 (10.6) / 7.5 (12.0)	7.5 (12.0)	7.5 (12.0)
7.5 (12.0) / 7.5 (12.0)	7.5 (12.0) / 7.5 (12.0)	7.5 (12.0)	7.5 (12.0)
69 (.35) / 98 (.50)	67 (.34) / 92 (.47)	77 (0.39)	105 (0.53)
115 (.58) / 130 (.66)	115 (.58) / 130 (.66)	130 (0.66)	130 (0.66)
105 (.53)	105 (.53)	105 (.53)	105 (.53)
95 (.48)	95 (.48)	95 (.48)	95 (.48)
6620 (3002)	6900 (3129)	7988 (3623)	8367 (3795)
6402 (2903)	7025 (3186)	8274 (3752)	6714 (3045)
3718 (1686)	3875 (1757)	4214 (1911)	4653 (2110)
2570 (1166)	2645 (1200)	3091 (1402)	3259 (1478)
4050 (1837)	4255 (1930)	4897 (2221)	5108 (2317)
4/2	4/2	4/2	4/2
(4) 5 x 3.76 urethane (127x96)	(4) 5 x 3.76 urethane (127x96)	(4) 5 x 3.76 urethane (127x96)	(4) 5 x 3.76 urethane (127x96)
13.5 x 5.5 rubber (343 x 140)	13.5 x 5.5 rubber (343 x 140)	13.0 x 5.5 urethane (330 x 140)	13.0 x 5.5 urethane (330 x 140)
8 x 4 urethane (203 x 102)	8 x 4 urethane (203 x 102)	8 x 4 urethane (203 x 102)	8 x 4 urethane (203 x 102)
56.1 (1425)	56.1 (1425)	61.7 (1567)	65.75 (1670)
28.7 (729)	28.7 (729)	28.7 (729)	28.7 (729)
1.75 (44)	1.75 (44)	1.75 (44)	1.75 (44)
Regenerative Auto-Electro-Magnetic	Regenerative Auto-Electro-Magnetic	Regenerative Auto-Electro-Magnetic	Regenerative Auto-Electro-Magnetic
Power	Power	Power	Power
Lead-Acid	Lead-Acid	Lead-Acid	Lead-Acid
28.9 / 27.0	28.9 / 27.0	37.6	37.6
1590 (722)	1590 (722)	2175 (987)	2175 (987)
7.9 (200)	7.9 (200)	7.9 (200)	7.9 (200)
6.7 (170)	6.7 (170)	6.7 (170)	6.7 (170)
4.2 (106.5)	4.2 (106.5)	4.2 (106.5)	4.2 (106.5)
AC Induction Motor Controller	AC Induction Motor Controller	AC Induction Motor Controller	AC Induction Motor Controller
Solid State	Solid State	Solid State	Solid State
AC Induction Motor Controller	AC Induction Motor Controller	AC Induction Motor Controller	AC Induction Motor Controller
AC Induction Motor Controller	AC Induction Motor Controller	AC Induction Motor Controller	AC Induction Motor Controller

4 Right angle stacking aisle for pallet size shown. Add 6-8 in (152-203 mm) for operating clearance. See "General Data" for other pallet sizes.  
5 Travel speed reduced to 6.75 mph (10.8 kph) when traveling forks leading.





## ***& Don't Forget...*** **Safety Starts With You!**

**Before operating a lift truck, an operator must:**

- Be trained and authorized
- Read and understand operator's manual
- Not operate a faulty lift truck
- Not repair a lift truck unless trained and authorized
- Have the overhead guard and load backrest extension in place
- Perform daily inspections

**During operation, a lift truck operator must:**

- Keep feet, legs and all parts of body inside operator compartment
- Never carry passengers or lift people
- Keep truck away from people and obstructions
- Travel with lift mechanism as low as possible and tilted back
- Allow safe stopping distance and come to a complete stop before leaving operator compartment

**To park a lift truck, an operator must:**

- Completely lower forks or attachments
- Turn key off



## 100 YEARS OF MATERIAL HANDLING INNOVATION

A Centennial is an important milestone which not only celebrates longevity, but testifies to the strength of the CLARK brand across generations. This is reflected in the more than one million lift trucks manufactured by CLARK Material Handling Company over the past 100 years. Even more powerful than the number of trucks built is the company's legacy of innovation. It began in 1917 when employees of CLARK Equipment Company constructed a simple three-wheeled shop buggy to haul sand and castings between buildings at their Buchanan, Michigan plant. The "Trutractor" as the shop buggy was named,



became the first internal combustion material handling truck and was a great success. The industrial truck was born and in the process CLARK developed the first hydraulic lift. Through the years, many extraordinary inventions followed, among them the nested I-beam upright, overhead guard and operator restraint system. The founding principles of Eugene B. Clark are still true: "Aim always to build the best; never be content with just as good." Today the company remains focused on a bright future and the technologies and trends driving the material handling industry around the world. One Purpose, One Brand, One Legacy, One Century.

### CLARK MATERIAL HANDLING COMPANY

North American Headquarters  
700 Enterprise Drive • Lexington, KY 40510  
866-252-5275 • [www.clarkmhc.com](http://www.clarkmhc.com)



To Find Your Nearest Authorized  
CLARK Dealer, Visit Our Website  
[www.clarkmhc.com](http://www.clarkmhc.com)

NPX15D/17/20/22  
59-894-1055 Printed in USA OPT03181.5M

© 2018 CLARK Material Handling Company